

INO804X-RAT

Premium Series 8MP IR PTZ Camera 4X

Infinique offers a wide range of IP based high definition cameras available in housing formats, including Dome, Bullet, Box and PTZ. Our cameras are equipped with superior image sensor and digital signal processor to produce sharp, crisp pictures and are enclosed in weather and vandal resistant housings making it suitable for use in all security applications. The ONVIF compliance of the cameras helps in easy integration, providing peace of mind for your investment. From small to very large installations, Infinique's cameras are reliable, future proof and an ideal solution for your video surveillance needs.

Infinique's 8MP IR PTZ comes with 4X Optical Zoom. It is compact in size with a reliable mechanical design that offers precise positioning and predictable high-speed tracking. This high quality PTZ dome provides excellent image quality in difficult lighting conditions and provides features such as privacy zone blanking, guard tours, multiple presets, alarms which are required for efficient 24/7 surveillance.

This camera is equipped with smart IR and has a night vision of up to 30m and provides a 355° degree rotation at speed of up to 45° per second and can be used both during day and night.

An easy to install design comes standard with a bracket that allows both wall and ceiling mount making it a suitable choice for any indoor application such as retail stores, restaurants, malls, airports, factories, warehouses, airports, government buildings where detailed video surveillance is essential.


Product Features

- 1/2.7" Progressive Scan Image Sensor
- 8MP Resolution at 25/30 fps
- Smart IR, IR Distance 30m
- Digital WDR
- 4x Optical Zoom
- H.265, H.264 Compression
- Up to 3 Simultaneous Video Streams
- Track targets with 360° Rotation
- Preset/Tour/Scan/Pattern Function
- True Day & Night with ICR Cut Filter
- S/N Ratio of more than 50dB
- Micro SD Card Slot for Onboard Storage
- Audio I/O, Alarm I/O
- ABS Plastic Housing
- IP66 Rated
- Easy control by Keyboard (OSD)
- ONVIF Compliant



Dimensions

1

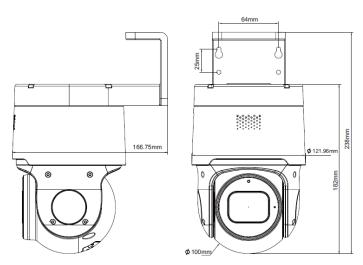

INO804X-RAT

Premium Series 8MP IR PTZ Camera 4X



IMAGE PERFORMANC	CE	NETWORK	
Image Sensor	1/2.7" Progressive Scan CMOS	Network Port	10/100M BASE-TX, RJ-45 Connector
Resolution (H x V)	3840 x 2160	Cabling Type	Category 6 and higher
Minimum Illumination Image Rate (FPS)	Color 0.009 lux with AGC On, B/W 0 lux with IR	Network Protocol	IPv4, HTTP, HTTPS, TCP/IP, UDP, RTP, RTSP, RTCP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP, ICMP
IR Distance (m)	30	ONVIF Protocol	ONVIF Compliant Profile-S/G/T
· , ,		Security	User Access with password protection, IP Filtering
IR Diming S/N Ratio	Adjustable More than 50dB	Users	1 Administrator, 4 Users
·	More IIIan Soab	PC Web Browser	IE 6.0 Above
LENS		Mobile Device	Android, iPhone
Focal Length (mm)	2.8 ~ 12	Events	Motion, Sensor, Network Failure
Iris	DC Auto Iris, Manual	Event Handlers	Pre-Post Event Image, FTP, E-mail, SD Card Recording
Aperture Ratio	F1.6	PTZ CONTROL	
Angle of View (deg)	H:113 (Wide)~31.4 (Tele), V:58.4 (Wide)~17.6 (Tele)		Desc. 255 / Tilb. 0 to 00
Zoom Ratio	4x Optical Zoom	Pan/Tilt Angle (deg)	Pan: 355 / Tilt: 0 to 90
VIDEO AND AUDIO		Pan Speed (deg)	0.6° to 45° per sec
Video Compression	H.265 Main Profile	Tilt Speed (deg)	0.6° to 38° per sec
Video Compression	H.264 Baseline Profile/Main Profile/High Profile	Preset Positions	255 Positions
Main Stream	3840x2160, 2592×1944, 3072x1728, 2592x1520,	Tour	4 Group Tours, Each tour up to 8 Presets
	2304x1296, 1920x1080, 1280x960, 1280x720	Scan	1 Programmable Scan
Sub Stream	1280x720, 640x480, 320x240	Pattern	4 Patterns
Mobile Stream	640x480, 320x240	Default Position	Preset / Tour / Scan / Pattern
Electronic Shutter Control	1/5 ~ 1/20000	Communication	RS-485 - 2400, 4800, 9600, 38400 bps
Day/Night Control	IR Cut Filter with Auto Switch	RS-485 Protocol	Pelco-D, Pelco-P
Flicker Control	50 Hz, 60 Hz	MECHANICAL	
WDR	Digital WDR	Housing ID	V4POMWH661030S1
White Balance	Auto / Manual / Indoor	Dimensions (mm)	167 (D) x 238 (H)
Backlight Compensation	On / Off	Weight (g)	920
Automatic Gain Control	Auto/Manual, Adjustable Level	Housing	ABS Plastic
Smart Defog	Supported	Finish	White, RAL 9003
Audio Compression	G.711A/G.711U/G.726	Installation	Ceiling / Wall Mount
Audio Input / Output	Built-in Microphone/Speaker	ELECTRICAL	
Video Output	IP-RJ45, CVBS-BNC Type	Power Consumption	13W
Alarm I/O	1 Inputs, 1 Relay Output (N.O), Built-in Flashing Lights	Power Source	PoE IEEE802.3af; DC12V
Video Bit rate	32Kbps~16Mbps, Supports CBR/VBR	Power Connector	NA
000	Camera ID, Pan/Tilt Angle, Mode, Zoom Ratio Setting/		3V Magnesium Lithium
OSD	Control via Joystick	RTC Backup Battery	3V Magnesian Elinian
Image Orientation	Image Flip, Mirror	ENVIRONMENTAL	
Image Controls	Brightness, Contrast, Hue, Saturation, Acu, Gamma	Operating Temperature (C)	
Advanced Functions	Image Rotation, Anti-Fog, Smart IR Detection	Storage Temperature (C)	
VIDEO ANALYTICS		Operating Humidity	0% - 90% non condensing
Advance Video Analytics	Tamper, Out Of Focus, Sound, Perimeter Intrusion, Line Crossing, Stationary Object, Pedestrian Detection, People Counting, Face Detection, Smart Tracking	Ingress Protection Rating	IP66
		Impact Rating STANDARDS COMPLIA	IK10
LOCAL STORAGE	- 1-p. 2 daming, 1 dad 2 diodion, ornan naoring	STANDARDS CONFLIA	
Memory Card Slot	Micro SD/SDHC/SDXC, Max 256GB Slot	Emissions	FCC Part 15 Subpart B Class B EN 55022:2010, IC ICES-003 Class B
WOLLIOIS COID SIDI		Immunity	EN 55024:2010
Recording	Video and Image; Auto / Manual; Motion, Alarm Trigger, Schedule	Safety	UL 609501, EU: 2001/95/EC GPSD
ORDERING INFORMA	ATION		
PART NUMBER		DESCRIPTION	
			X Optical Zoom, H.265, H.264, Three Stream, DWDR, Tru



Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.