

INO837X-RAWT

Premium Series 8MP IR WDR Outdoor Speed Dome PTZ Camera 37X

Infinique offers a wide range of IP based high definition cameras available in various housing formats, including Box, Dome and Bullet. Our cameras are equipped with superior image sensor and digital signal processor to produce sharp, crisp pictures and are enclosed in weather and vandal resistant housings making it suitable for use in all security applications. The ONVIF compliance of the cameras helps in easy integration, providing peace of mind for your investment. From small to very large installations, Infinique’s cameras are reliable, future proof and an ideal solution for your video surveillance needs.

Infinique’s 8MP IR PTZ comes with 37X Optical Zoom with 130dB true WDR. It is compact in size with a reliable mechanical design that offers precise positioning and predictable high-speed tracking. This high quality PTZ dome provides excellent image quality in difficult lighting conditions and provides features such as privacy zone blanking, guard tours, multiple presets, alarms which are required for efficient 24/7 surveillance.

This camera is equipped with smart IR and has a night vision of up to 200m and provides crisp and clear images both during day and night. It can pan with a continuous 360° degree rotation at a very high speed of 200° per second.

An easy to install design with wall, ceiling and pole mount brackets allows for quick installation, makes it a suitable choice for any indoor and outdoor application such as large retail stores, malls, airports, factories, warehouses, airports, government buildings where detailed video surveillance is essential.


Product Features

- 1/1.8" Progressive Scan Image Sensor
- 8MP Resolution at 25/30fps
- Smart IR, IR Distance 200m
- 130dB True WDR
- 37x Optical Zoom
- H.265+, H.265, H.264+, H.264 Compression
- Up to 3 Simultaneous Video Streams
- Track targets with 360° Rotation
- Preset/Tour/Scan/Pattern Function
- True Day & Night with ICR Cut Filter
- S/N Ratio of more than 50dB
- Micro SD Card Slot for Onboard Storage
- Audio I/O, Alarm I/O
- Vandal Proof Aluminum Alloy Housing
- IP67 and IK10 Rated
- Easy control by Keyboard (OSD)
- ONVIF Compliant



Dimensions

206 mm

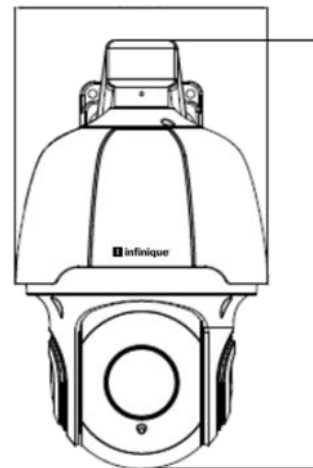

352 mm

Accessories



Part No: IBKTWM
Wall Mount Bracket



Part No: IBKTCM
Ceiling Mount Bracket



Part No: IBBCPM
Pole Mount Bracket

INO837X-RAWT

Premium Series 8MP IR WDR Outdoor Speed Dome PTZ Camera 37X



IMAGE PERFORMANCE	
Image Sensor	1/1.8" Progressive Scan CMOS
Resolution (H x V)	3840 x 2160
Minimum Illumination	Color 0.0005 lux AGC On, B/W 0 lux with IR
Image Rate (FPS)	25 / 30
IR Distance (m)	200
IR Dimming	Adjustable
S/N Ratio	More than 50dB
LENS	
Focal Length (mm)	5.5 ~ 202
Iris	DC Auto Iris, Manual
Aperture Ratio	F1.6 ~ F4.3
Angle of View (deg)	H:60 (Wide)~2.3 (Tele), V:35.5 (Wide)~1.3 (Tele)
Zoom Ratio	37x Optical Zoom, 16x Digital
VIDEO AND AUDIO	
Video Compression	H.265+, H.265 Main Profile H.264+, H.264 Baseline Profile/Main Profile/High Profile
Main Stream	3840x2160, 3072x1728, 2592x1944, 2592x1520, 2048x1536, 2304x1296, 1920x1080, 1280x960, 1280x720
Sub Stream	1920x1080, 1280x720, 640x480, 320x240, MJPEG
Mobile Stream	640x480, 320x240
Electronic Shutter Control	1/5 ~ 1/20000
Day/Night Control	IR Cut Filter with Auto Switch
Flicker Control	50 Hz, 60 Hz
True WDR	130dB
White Balance	Auto / Manual / Indoor
Backlight Compensation	On / Off
Automatic Gain Control	Auto/Manual, Adjustable Level
Smart Defog	Supported
Audio Compression	G.711A/G.711U/G.726
Audio Input / Output	Line level input and output, 3.5mm A/V Interface
Video Output	IP-RJ45, CVBS-BNC Type
Alarm I/O	1 Alarm Inputs, 1 Relay Output (N.O)
Video Bit rate	32Kbps~16Mbps, Supports CBR/VBR
OSD	Camera ID, Pan/Tilt Angle, Mode, Zoom Ratio Setting/ Control via Joystick
Image Orientation	Image Flip, Mirror
Image Controls	Brightness, Contrast, Hue, Saturation, Acu, Gamma
Advanced Functions	Image Rotation, Anti-Fog, Smart IR Detection
VIDEO ANALYTICS	
Advance Video Analytics	Tamper, Out Of Focus, Sound, Perimeter Intrusion, Line Crossing, Stationary Object, Vehicle and Human Detection, People Counting, Face Detection
LOCAL STORAGE	
Memory Card Slot	Micro SD, Max 512GB
Recording	Video and Image; Auto / Manual; Motion, Alarm Trigger, Schedule
NETWORK	
Network Port	10/100M BASE-TX, RJ-45 Connector
Cabling Type	Category 6 and higher
Network Protocol	IPv4/6, HTTP, HTTPS, TCP/IP, UDP, RTP, RTSP, RTMP, SNMP, DNS, DDNS, DHCP, FTP, NTP, PPPoE, SMTP, UPNP, ICMP
ONVIF Protocol	ONVIF Compliant Profile-S, G, T
Security	User Access with password protection, IP Filtering
Users	3 levels, Administrator, Operator, User, Max 32 Users
PC Web Browser	IE 6.0 Above; Mozilla Firefox; Google Chrome
Mobile Device	Android, iPhone
Events	Motion, Sensor, Network Failure
Event Handlers	Pre-Post Event Image, FTP, E-mail, SD Card Recording
PTZ CONTROL	
Pan/Tilt Angle (deg)	Pan: 360 Endless / Tilt: -10 to 180 / Auto Flip
Pan Speed (deg)	0.1 to 200 per sec
Tilt Speed (deg)	0.1 to 100 per sec
Preset Speed / Positions	200 deg per sec / 255 Positions
Tour	4 Group Tours, Each tour up to 32 Presets
Scan	1 Programmable Scan
Pattern	4 Patterns
Default Position	Preset / Tour / Scan / Pattern
Communication	RS-485 - 2400, 4800, 9600, 38400 bps
RS-485 Protocol	Pelco-D, Pelco-P
MECHANICAL	
Housing ID	V4POMWH671015S1
Dimensions (mm)	206 (D) x 352 (H)
Weight (g)	Approx 3700
Finish	White Powder Coat, RAL 9003
Installation	Ceiling / Wall / Pole Mount
ELECTRICAL	
Power Consumption	54W
Power Source	PoE IEEE802.3bt; DC12V; AC 24V
Power Connector	2 pin terminal block
RTC Backup Battery	3V Magnesium Lithium
ENVIRONMENTAL	
Operating Temperature (C)	-30 to 65
Storage Temperature (C)	-20 to 60
Operating Humidity	0% - 90% non condensing
Ingress Protection Rating	IP67
Impact Rating	IK10
STANDARDS COMPLIANCE	
Emissions	FCC Part 15 Subpart B Class B EN 55022:2010, IC ICES-003 Class B
Immunity	EN 55024:2010
Safety	UL 609501, EU: 2001/95/EC GPSD
ORDERING INFORMATION	
PART NUMBER	DESCRIPTION
INO837X-RAWT	Infinique Premium Series Outdoor IR PTZ Speed Dome IP Camera, 1/1.8 CMOS Sensor, 8MP, 37X Optical Zoom, H.265, H.264, Three Stream, 130dB WDR, True Day and Night with ICR, Adjustable Bit Rate, ONVIF Compliant, Audio, SDHC Slot, IP67, IK10
IBKTWM	Infinique PTZ Camera Wall Mount Bracket
IBKTCM	Infinique PTZ Camera Ceiling Mount Bracket
IBBCPM	Infinique Outdoor Pole Mount Bracket with Metal Ties

Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.

INO837X-RAWT

Premium Series 8MP IR WDR Outdoor Speed Dome PTZ Camera 37X



Housing Accessories

WALL MOUNT APPLICATION



Wall Bracket
IBKTWM

CEILING MOUNT APPLICATION



Ceiling Bracket
IBKTCM

POLE MOUNT APPLICATION



Pole Bracket
IBBCPM



Wall Bracket
IBKTWM



Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.