

INR8-24F2I-SE18P

Premium Series NVR, 8 Channels with built-in 8 PoE Ports



Infinique offers a wide range of video management solutions for IP based video surveillance that are extremely easy to install, use and maintain. The hardware is optimized for video surveillance by consolidating disparate components into a single chassis greatly reducing the total cost of ownership. The application software has an open architecture that comply to Onvif and industry standard protocols, making it future proof and providing peace of mind for your investment. From small to very large installations, Infinique's IP based video recorders are an ideal solution for today's high demanding video surveillance needs.

Infinique's INR8-24H11-S8P is a 8 Channel easy to use network video recorder designed for small and medium sized video surveillance installations. This standalone NVR comes with embedded Linux OS and VMS and provides simultaneous real time live viewing, recording and playback of 8 Channels in Full HD.


Designed as a plug-and-play NVR, installation and commissioning is effortless. The NVR is ONVIF compliant and supports IP cameras with resolution ranging from 1 to 8 Megapixels. It has support for installing up to 2 SATA HDDs internally and can provide a maximum storage capacity of 32TB when using a 16TB hard drive.

Surveillance Client, is a powerful and user friendly Central Management Software that comes free with the NVR. It allows users to connect to multiple NVRs and cameras at geographically dispersed locations. Users can create groups and assign cameras from different NVRs. They can also create user accounts to cater to different user privileges. The interactive map monitor allows users to have a complete visual overview of installation from a single client using imported maps for easy identification and navigation.

PRODUCT FEATURES

- Supports simultaneous real-time live view and playback of 8 Channels in Full HD
- Embedded Linux OS and VMS with no moving parts for increased system response time and reliability
- Plug-and-play device designed with built-in 8 port PoE switch for easy and faster commissioning
- Install up to 2 SATA HDDs, provides a maximum storage capacity of 32TB
- Supports H.265 and H.264 Compression
- Record Bandwidth of maximum 128Mbps
- ONVIF Compliant and supports IP cameras with resolution ranging from 1 to 8 Megapixels
- Continuous, Motion Detection, and Alarm recording supported
- Backup using USB Storage Device, HDD or over a Network
- View live video remotely using Central Monitoring Software on a PC or via an app on iPhone and Android devices.

Dimensions

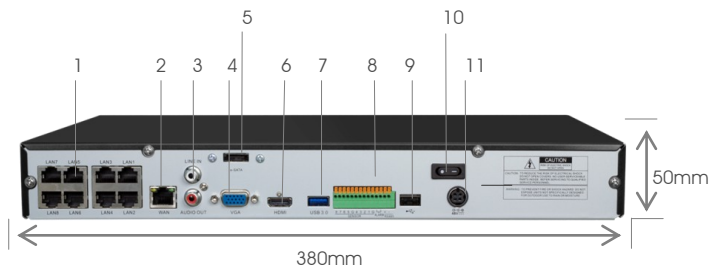

No	Physical Interface	Function
1	PoE Ports	Ports to connect Cameras to NVR
2	WAN Port	Port to connect NVR to router
3	Audio Ports	Audio IN and Audio Out Ports
4	VGA Port	Port to connect to VGA displays
5	E-SATA Port	E-SATA Port to connect to External Hard Drives
6	HDMI Port	High Definition port to connect to displays
7	USB Port	To connect USB Mouse and USB drive
8	Sensor/Alarm	To connect to Sensor or Alarm
9	USB Port	To connect USB Mouse and USB drive
10	Power Switch	Switch to turn ON/OFF Power
11	Mouse Port	To connect to Mouse

INR8-24F2I-SE18P

Premium Series NVR, 8 Channels with built-in 8 PoE Ports



SYSTEM		MECHANICAL	
Operating System	Embedded Linux	Form Factor	Standalone Chassis
User Interface	User Friendly Graphical User Interface	Dimensions (mm)	380(L) x 340(W) x 50(H)
Camera Channels	8 Channels	Weight (Kg)	3.5
Internal Storage	2 x SATA HDD Slot	ELECTRICAL	
USB Interface	1 x 3.0 USB, 2x 2.0 USB	Power Consumption (Excluding HDD)	9.5W
E-SATA Interface	1 x E-SATA Port	Power Supply	DC 48V; PoE Switch: 48V
Alarm Ports	8x Digital Inputs, 1x Digital Outputs	ENVIRONMENTAL	
Ethernet Interface	1x GbE Port	Operating Temperature (C)	10° to 35° (50° to 95°F)
PoE Ports	Max 8x IEEE802.3at PoE Ports	Storage Temperature (C)	-40° to 70° (-40° to 158°F)
Cameras Supported	Infinique, ONVIF Compliant Cameras	Operating Humidity	8% to 90%, non-condensing
CLIENT MODULES		Non-Operating Humidity	5% to 95%, non-condensing
Surveillance Client	Centralized Management and Monitoring	Operating Altitude	-16m to 3048m (-50ft to 10,000ft)
Phone Apps	Apple, Android for remote live view and playback	Note: The server room temperature can be affected by air conditioning system, floor layout, rack configuration, etc. The NVR air intake temperature, can be significantly higher than the room temperature. To prevent system and hard drive failure, make sure the air intake temperature of the NVR is always within the operating temperature range.	
Web Client	Control and Watch Live from remote PC using browser	ACCESSORIES SUPPLIED	
VIDEO AND AUDIO		Power Cord	Based on country; 3 prong molded connector, 1.8 m (6 ft) Cord Length
Video Outputs	1x VGA, 1x HDMI Ports (up to 4K)	USB Mouse	1 nos
Video Standards	NTSC 60 Hz, PAL 50 Hz	Documentation	Manual on CD
Video Decoding	H.265, H.264	STANDARDS COMPLIANCE	
Audio	RCA Line-In, RCA Audio Out	Emissions	FCC Part 15 Subpart B Class B EN 55022:2010 IC ICES-003 Class B
DISPLAY AND RECORDING		Immunity	EN 55024:2010
Recording Resolution	8MP (4K), 5MP, 3MP, 2MP (1080P), 1.3MP (960P), 1.0MP(720P)	Safety	UL 609501, EU: 2001/95/EC GSPD
Live / Playback	4K resolution: 4Ch Real time (30 fps) 4MP resolution: 8Ch Real time (30 fps) 3MP resolution: 8Ch Real time (30 fps) 2MP resolution: 8Ch Real time (30 fps)		
Display Split	1/4/6/8/9		
Bit Rate	32 ~ 8192kbps		
Record Mode	Continuous, Manual, Motion Detection, Sensor and Alarm		
Record Bandwidth	Max 128Mbps		

ORDERING INFORMATION	
PART NUMBER	DESCRIPTION
INR8-24F2I-SE18P	Infinique Premium Series 8Ch NVR, 128Mbps Record Bandwidth, Recording @240fps in Full HD, Display @240fps in Full HD, H.265, H.264, 2 x Internal SATA HDD Slots, Max 32TB, E-SATA, 8 PoE Ports, Hard Drive not included



Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.